





主要特点/Features


- 悬臂梁式
- 合金钢 / 不锈钢材质
- 高精度
- 高稳定性
- 安装简便、快速
- 适用于配料秤、包装秤、小型料斗秤、皮带秤等

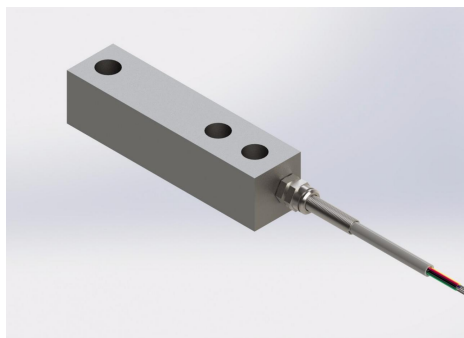

尺寸 Dimensions in mm:

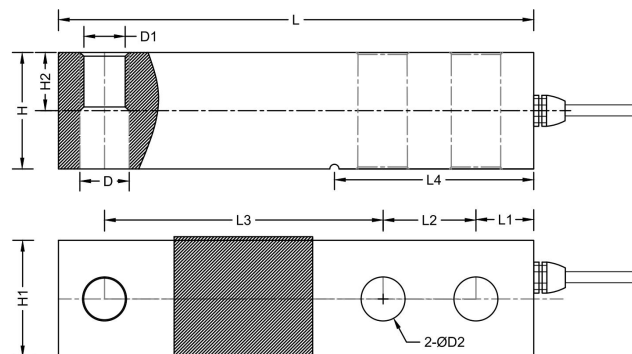

接线/Wiring diagram:

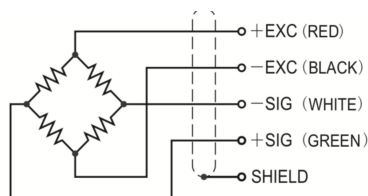

量 程	L	L1	L2	L3	L4	H	H1	H2	D/D2	D1
0.05~2t	130	15.8	25.4	76.2	54.2	31.8	31.8	15.8	Φ13.5	M12*1.75
3~5t	171.5	19.1	38.1	95.3	77.2	38.1	38.1	18.8	Φ19.8	M18*1.5
7.5~10t	225.5	25.4	50.8	20.7	101.6	50.8	50.8	25.4	Φ26.9	M24*2

技术指标/Specifications

额定容量/Rated Capacity	50、100、200、300、500Kg、1t、2t、3t、5t、7.5t、10t
精度等级/Accuracy level	0.03%
综合误差/Comprehensive error	±0.03%FS
输出灵敏度/Rated output	2.0±0.2mV/V
零点平衡/Zero balance	±1.0%FS
蠕变（30 分钟）Creep (30 minutes)	±0.03%FS
补偿温度范围/Comp.Temp.	-10℃~40℃
工作温度范围/Working Temp. Range	-20℃~60℃
零点温度影响/Temp. Effect on zero	±0.03%FS/10℃
灵敏度温度影响/Temp. Effect on output	±0.03%FS/10℃
输入阻抗/Input impedance	385 ±10Ω
输出阻抗/Output impedance	350 ±3Ω
绝缘阻抗/Insulation impedance	5000MΩ
推荐激励电压/Recommended excitation	9~12VDC
安全过载/Safe overload	150%FS
极限过载/Ultimate Overload	200%FS
材质/Material	不锈钢/stainless steel
电缆线规格/Cable specification	6mm, 四芯屏蔽电缆线/4-wire shielded cable
防护等级/Protection level	IP66
认证/Authentication	CE、RoHS
电子数据/TEDS	可选/Optional