



主要特点/Features



- 悬臂梁式
- 合金钢 / 不锈钢材质
- 高精度
- 高稳定性
- 安装简便、快速
- 适用于配料秤、包装秤、小型料斗秤、皮带秤等



尺寸 Dimensions in mm:



接线/Wiring diagram:

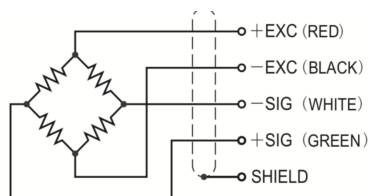

量 程	H	H1	H2	B1	B2	D1	D2	L	L1	L2	L3	L4	L5	L6
0.25~2t	106	58	18	100	100	13	13	210	175	140	116	80	70	70
3~5t	135	73	23	150	150	17	17	270	235	200	150	100	90	90
7.5~10t	186.3	93.3	上 38 下 28.5	180	180	26	26	345	310	250	210.4	150.4	110	110

技术指标/Specifications

额定容量/Rated Capacity	250、300、500Kg、1t、2t、3t、5t、7.5t、10t
精度等级/Accuracy level	0.03%
综合误差/Comprehensive error	±0.03%FS
输出灵敏度/Rated output	2.0±0.2mV/V
零点平衡/Zero balance	±1.0%FS
蠕变 (30 分钟) Creep (30 minutes)	±0.03%FS
补偿温度范围/Comp.Temp.	-10℃~40℃
工作温度范围/Working Temp. Range	-20℃~60℃
零点温度影响/Temp. Effect on zero	±0.03%FS/10℃
灵敏度温度影响/Temp. Effect on output	±0.03%FS/10℃
输入阻抗/Input impedance	385 ±10Ω
输出阻抗/Output impedance	350 ±3Ω
绝缘阻抗/Insulation impedance	5000MΩ
推荐激励电压/Recommended excitation	9~12VDC
安全过载/Safe overload	150%FS
极限过载/Ultimate Overload	200%FS
材质/Material	不锈钢/stainless steel
电缆线规格/Cable specification	6mm, 四芯屏蔽电缆线/4-wire shielded cable
防护等级/Protection level	IP66
认证/Authentication	CE、RoHS
电子数据/TEDS	可选/Optional