


主要特点/Features


- 悬臂梁式
- 不锈钢/合金钢材质可选
- 自复位压头设计
- 360 度水平限位拉杆
- 支持现场无传感器安装
- 适用于配料秤、包装秤、小型料斗秤、皮带秤等
- 与托利多 SWB505 模块兼容



尺寸 Dimensions in mm:

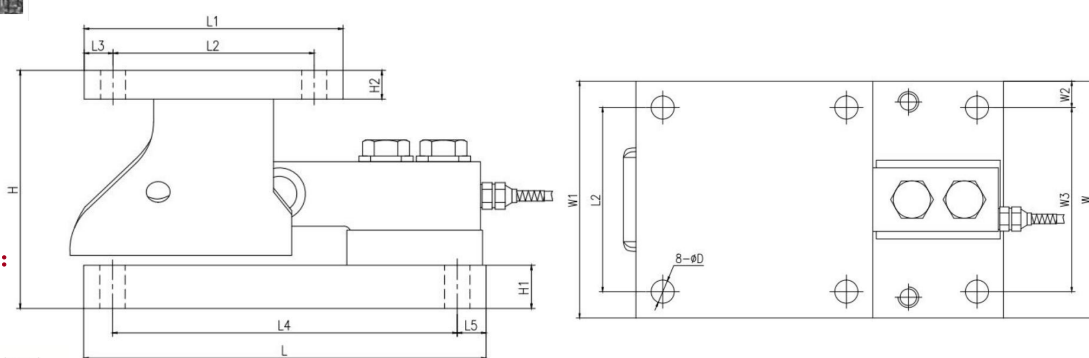

接线/Wiring diagram:

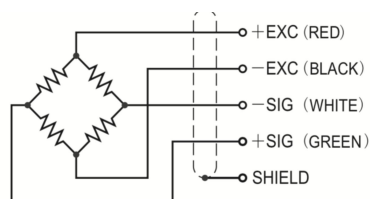

额定载荷	尺寸 (mm) Size												
Rated Load	H	H1	H2	L	L1	L2	L3	L4	L5	W=W1	W2	W3	D
20kg~100kg	83	12.7	8	165	102	82	10	145	10	102	10	82	10
220kg~2.2t	105.2	19.1	12.7	178	114.4	89	12.7	152.4	12.7	114.4	12.7	89	11.2
4.4t	136.6	25.4	19.1	235	152.4	101.6	25.4	184.2	25.4	152.4	25.4	101.6	17.5

额定容量/Rated Capacity	20、50、100、220Kg、550kg、1t、2.2t、4.4t
精度等级/Accuracy level	0.03%
综合误差/Comprehensive error	±0.03%FS
输出灵敏度/Rated output	2.0±0.2mV/V
零点平衡/Zero balance	±1.0%FS
蠕变 (30 分钟) Creep (30 minutes)	±0.03%FS
补偿温度范围/Comp.Temp.	-10℃~40℃
工作温度范围/Working Temp. Range	-20℃~60℃
零点温度影响/Temp. Effect on zero	±0.03%FS/10℃
灵敏度温度影响/Temp. Effect on output	±0.03%FS/10℃
输入阻抗/Input impedance	385 ±10Ω
输出阻抗/Output impedance	350 ±3Ω
绝缘阻抗/Insulation impedance	5000MΩ
推荐激励电压/Recommended excitation	9~12VDC
安全过载/Safe overload	150%FS
极限过载/Ultimate Overload	200%FS
材质/Material	不锈钢/stainless steel
电缆线规格/Cable specification	6mm, 四芯屏蔽电缆线/4-wire shielded cable
防护等级/Protection level	IP66
认证/Authentication	CE、RoHS
电子数据/TEDS	可选/Optional