
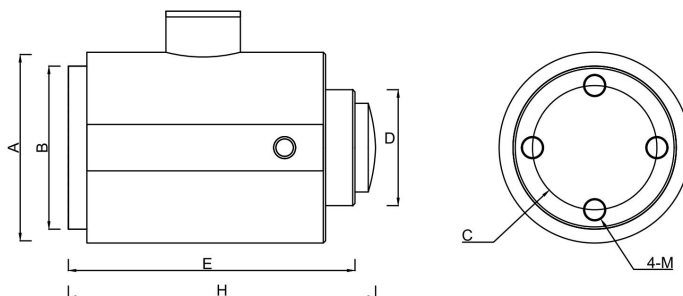


主要特点/Features

- 柱式大量程
- 合金钢材质
- 高精度
- 高稳定性
- 安装简便、快速
- 适用于冶金、化工、钢厂等大量程的计量控制

尺寸 Dimensions in mm:

接线/Wiring diagram:

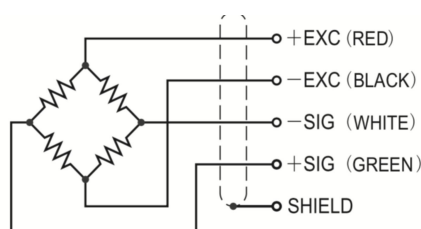

量程	尺寸 / mm								
KN	T	A	B	C	D	H	E	M	SR
150~300	15~30	86	73.5	56	40	140	129	10	200
400~600	40~60	100	87	68	80	150	133	12	350
1000	100	107	91	68	80	170	156	16	500
1500~2000	150~200	158	139	100	120	220	201	16	1000

技术指标/Specifications

额定容量/Rated Capacity	15、30、40、60、100、150、200T
精度等级/Accuracy level	±0.05%FS
综合误差/Comprehensive error	±0.05%FS
输出灵敏度/Rated output	2.0±0.2mV/V
零点平衡/Zero balance	±1.0%FS
蠕变（30 分钟）Creep (30 minutes)	±0.05%FS
补偿温度范围/Comp.Temp.	-10℃~40℃
工作温度范围/Working Temp. Range	-20℃~65℃
零点温度影响/Temp. Effect on zero	±0.03%FS/10℃
灵敏度温度影响/Temp. Effect on output	±0.03%FS/10℃
输入阻抗/Input impedance	380±10Ω
输出阻抗/Output impedance	350±3Ω
绝缘阻抗/Insulation impedance	5000MΩ
推荐激励电压/Recommended excitation	10V DC
安全过载/Safe overload	120%FS
极限过载/Ultimate Overload	150%FS
材质/Material	合金钢/Steel Alloy
电缆线规格/Cable specification	5mm, 四芯屏蔽电缆线/4-wire shielded cable 3m
防护等级/Protection level	IP65
认证/Authentication	CE、RoHS
电子数据/TEDS	可选/Optional