





主要特点/Features

- 紧凑型轮辐式
- 合金钢材质
- 高精度
- 高稳定性、配套柔性线缆耐用
- 安装简便、快速
- 适用仓储秤、配料秤、压力机等

尺寸 Dimensions in mm:

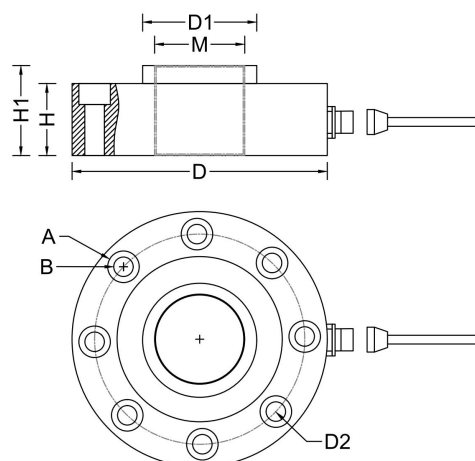

接线/Wiring diagram:



技术指标/Specifications

量程	D	D1	D2	M	H	H1	A	B
100~200kg	58	16	45	M12*1.5	22.5	24	4-Φ10.5*7	4-Φ6.5
500~1T	78	28	62	M20*1.5	22.5	24	8-Φ10.5*7	8-Φ6.5
2~10T	85	38	70	M30*1.5	24	30	8-Φ10.5*7	8-Φ6.5

额定容量/Rated Capacity	100Kg ~ 10T
精度等级/Accuracy level	0.3%FS
综合误差/Comprehensive error	±0.3%FS
输出灵敏度/Rated output	2.0 ±0.2mV/V
零点平衡/Zero balance	±1.5%FS
蠕变 (30 分钟) Creep (30 minutes)	±0.3%FS
补偿温度范围/Comp.Temp.	-10℃~40℃
工作温度范围/Working Temp. Range	-20℃~60℃
零点温度影响/Temp. Effect on zero	±0.1%FS/10℃
灵敏度温度影响/Temp. Effect on output	±0.1%FS/10℃
输入阻抗/Input impedance	750 ±10Ω
输出阻抗/Output impedance	700 ±3Ω
绝缘阻抗/Insulation impedance	5000MΩ
推荐激励电压/Recommended excitation	9~12VDC
安全过载/Safe overload	150%FS
极限过载/Ultimate Overload	200%FS
材质/Material	合金钢/Alloy steel construction
电缆线规格/Cable specification	5mm, 四芯屏蔽电缆线/4-wire shielded cable
防护等级/Protection level	IP65
认证/Authentication	CE、RoHS
电子数据/TEDS	可选/Optional