






主要特点/Features

- 扭环式
- 合金钢材质
- 高精度
- 高稳定性
- 安装简便、快速
- 适用仓储秤、配料秤、压力机等

尺寸 Dimensions in mm:



接线/Wiring diagram:

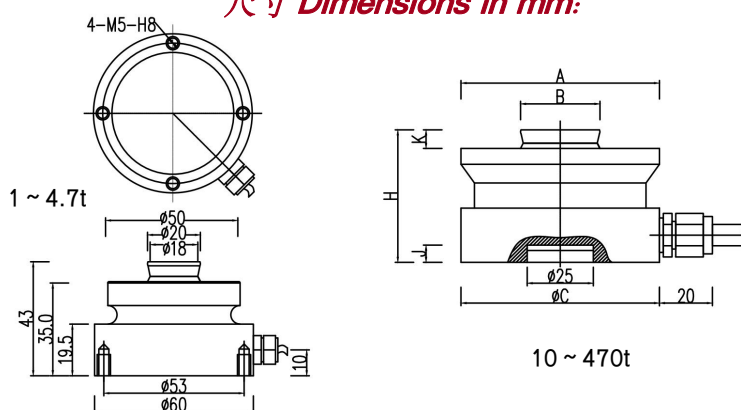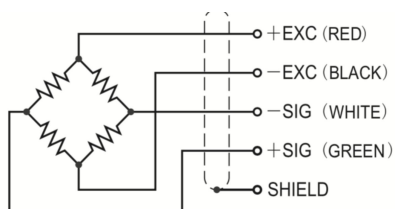

技术指标/Specifications

额定载荷 (t)	10~22	33	47	68	100	150	220	330	470
A	75.5	95	130	130	150	150	225	225	270
B	30	40	60	60	70	70	100	100	120
C	75	95	130	130	150	150	225	225	270
J	7	7	7	7	7	7	10	10	10
K	6.5	10	14	14	16	16	24	24	28
H	50	65	85	85	90	100	130	145	170

额定容量/Rated Capacity	10 ~ 470t
精度等级/Accuracy level	0.05%FS
综合误差/Comprehensive error	±0.05%FS
输出灵敏度/Rated output	2.85±0.2mV/V;
零点平衡/Zero balance	±1.5%FS
蠕变 (30 分钟) Creep (30 minutes)	±0.05%FS
补偿温度范围/Comp.Temp.	-10℃~40℃
工作温度范围/Working Temp. Range	-20℃~60℃
零点温度影响/Temp. Effect on zero	±0.03%FS/10℃
灵敏度温度影响/Temp. Effect on output	±0.03%FS/10℃
输入阻抗/Input impedance	750 ±10Ω
输出阻抗/Output impedance	700 ±3Ω
绝缘阻抗/Insulation impedance	5000MΩ
推荐激励电压/Recommended excitation	9~12VDC
安全过载/Safe overload	150%FS
极限过载/Ultimate Overload	200%FS
材质/Material	合金钢/Alloy steel construction
电缆线规格/Cable specification	四芯屏蔽电缆线/4-wire shielded cable
防护等级/Protection level	IP66
认证/Authentication	CE、RoHS
电子数据/TEDS	可选/Optional