



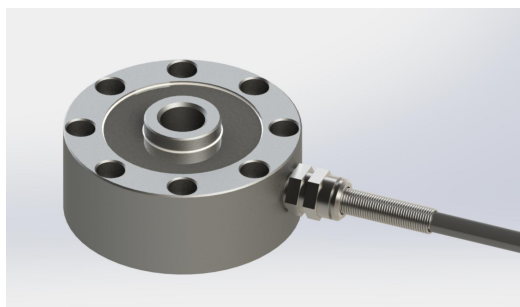



主要特点/Features

- 轮幅式
- 合金钢材质
- 高精度
- 高稳定性
- 安装简便、快速
- 适用仓储秤、配料秤、压力机等

尺寸 Dimensions in mm:



接线/Wiring diagram:

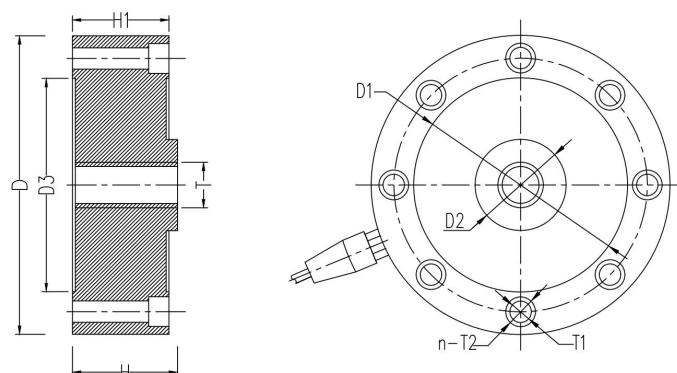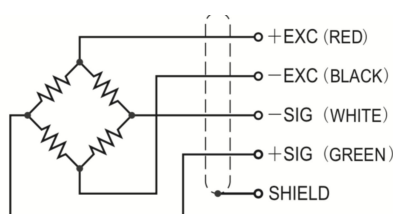

额定载荷 (t)	D	D1	D2	D3	H	H1	T	T1	T2	H2	n
10 ~ 25t	120.6	101.8	39	83	53.5	41	M32x1.5	8.5	14	10.5	8
30 ~ 50t	141	116.8	50.4	96.9	57.2	50.8	M40x1.5	11	18	11	8
60t	153	130	70	110	58	51	M40x1.5	10.5	17	16	8
100t	200	162	76	132	83	70	M60x2	13	20	18	16
150 ~ 200t	250	210	110	170	100	90	M80x3	17	28	20	16
300t	320	270	162	220	100	100	M96x4	17	28	20	16

技术指标/Specifications

额定容量/Rated Capacity	10 ~ 30 ~ 300t
精度等级/Accuracy level	0.03%、0.05FS
综合误差/Comprehensive error	±0.05%FS
输出灵敏度/Rated output	2.0±0.2mV/V; 3.0mV/V(可选)
零点平衡/Zero balance	±1.5%FS
蠕变 (30 分钟) Creep (30 minutes)	±0.05%FS
补偿温度范围/Comp.Temp.	-10℃~40℃
工作温度范围/Working Temp. Range	-20℃~60℃
零点温度影响/Temp. Effect on zero	±0.03%FS/10℃
灵敏度温度影响/Temp. Effect on output	±0.03%FS/10℃
输入阻抗/Input impedance	750 ±10Ω
输出阻抗/Output impedance	700 ±3Ω
绝缘阻抗/Insulation impedance	2000MΩ
推荐激励电压/Recommended excitation	9~12VDC
安全过载/Safe overload	150%FS
极限过载/Ultimate Overload	200%FS
材质/Material	合金钢/Alloy steel construction
电缆线规格/Cable specification	6mm, 四芯屏蔽电缆线/4-wire shielded cable
防护等级/Protection level	IP66
认证/Authentication	CE、RoHS
电子数据/TEDS	可选/Optional